



□ BELO_BE_80 CEILING

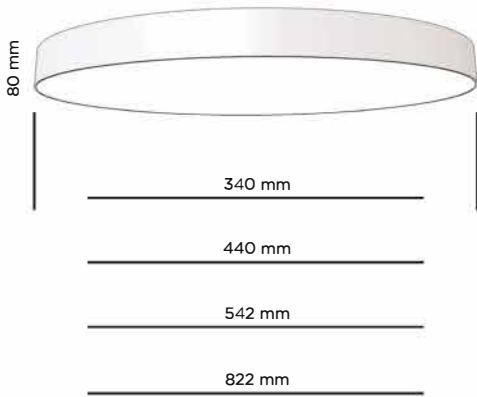

ARCHILIGHT



INSTALLATION

Ceiling version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/80/BE300	340	17	2680/2820
SBC/80/BE440	440	18	3020/3170
SBC/80/BE542	542	36	6120/6380
SBC/80/BE822	822	64	11980/13320

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/80/BE300/DI	340	17	2680/2820
SBC/80/BE440/DI	440	18	3020/3170
SBC/80/BE542/DI	542	36	6120/6380
SBC/80/BE822/DI	822	64	11980/13320

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

