


□ BELO\_GI\_110/80 SUSPENDED




ARCHILIGHT

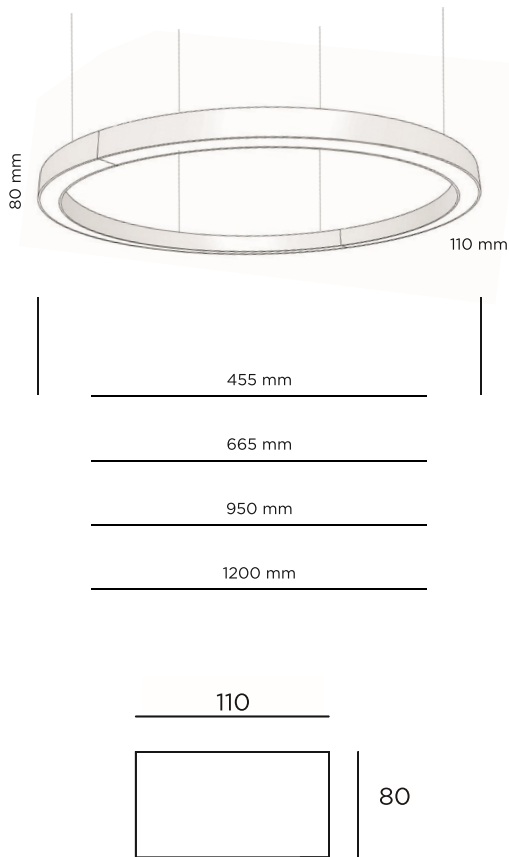

| DIRECT CODE | Ø (mm) | W  | Lm from 3000K/4000K |
|-------------|--------|----|---------------------|
| SBS/GI455   | 455    | 17 | 2680/2840           |
| SBS/GI665   | 665    | 26 | 4020/4260           |
| SBS/GI950   | 950    | 37 | 6030/6390           |
| SBS/GI1200  | 1200   | 50 | 8040/8520           |

| DIRECT/INDIRECT CODE | Ø (mm) | W  | Lm from 3000K/4000K |
|----------------------|--------|----|---------------------|
| SBS/GI455/DI         | 455    | 17 | 2680/2840           |
| SBS/GI665/DI         | 665    | 26 | 4020/4260           |
| SBS/GI950/DI         | 950    | 37 | 6030/6390           |
| SBS/GI1200/DI        | 1200   | 50 | 8040/8520           |

Delivered incl. 2 m self-locking suspensions

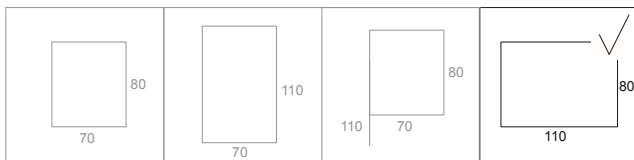

## INSTALLATION

Suspended version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION


Direct symmetrical  
Direct symmetrical / Passive indirect symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



Prismatic diffuser

## COLOR TEMPERATURE

3000K /3K  
4000K /4K

## OPTIC

PMMA OPAL /--  
PRISMATIC /P

## DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

## COLORS

|  |           |     |
|--|-----------|-----|
|  | WHITE     | /WH |
|  | BLACK     | /BL |
|  | SILVER    | /SI |
|  | ANTRACITE | /AT |
|  | GOLD      | /GL |
|  | BRONZE    | /BR |

## ACCESSORIES

|  |   |
|--|---|
|  | SPPKBO3075 (3X0,75)                         |
|  | SPPKBO5075 (5X0,75)                         |
|  | TRANSPARENT CABLE 2 METRES WITH CEILING BOX |