


# □ BELO\_LO\_OV\_80 SUSPENDED



ARCHILIGHT

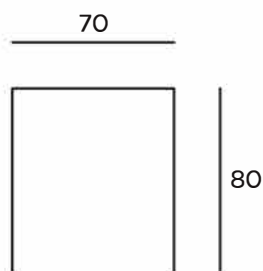

## INSTALLATION

Suspended version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is curved extruded aluminium,  
powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

OPAL

PRISMATIC

## LIGHT DISTRIBUTION

Direct symmetrical

Direct symmetrical / Passive indirect symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING


Most models can be delivered with ballast  
for dimming (TOUCHDIM, DALI)



A 847 \_\_\_\_\_

B 1129 \_\_\_\_\_

C 1411 \_\_\_\_\_

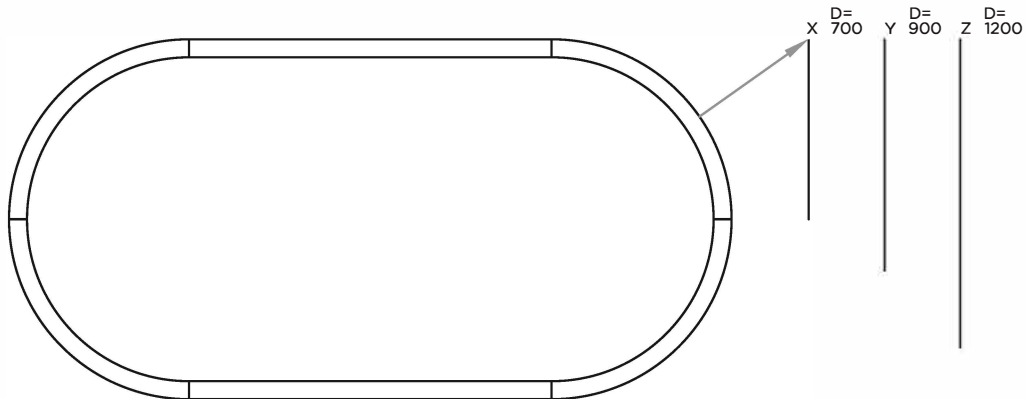

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/OV/AX	700x1547x80	54	8710/9230
SBS/80/OV/AY	900x1747x80	62	10050/10650
SBS/80/OV/AZ	1200x2047x80	74	12060/12780
SBS/80/OV/BX	700x1829x80	62	10050/10650
SBS/80/OV/BY	900x2029x80	70	11390/12070
SBS/80/OV/BZ	1200x2329x80	81	13400/14200
SBS/80/OV/CX	700x2111x80	70	11390/12070
SBS/80/OV/CY	900x2311x80	78	12730/13490
SBS/80/OV/CZ	1200x2611x80	91	14740/15620

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/OV/AX/DI	700x1547x80	54	8710/9230
SBS/80/OV/AY/DI	900x1747x80	62	10050/10650
SBS/80/OV/AZ/DI	1200x2047x80	74	12060/12780
SBS/80/OV/BX/DI	700x1829x80	62	10050/10650
SBS/80/OV/BY/DI	900x2029x80	70	11390/12070
SBS/80/OV/BZ/DI	1200x2329x80	81	13400/14200
SBS/80/OV/CX/DI	700x2111x80	70	11390/12070
SBS/80/OV/CY/DI	900x2311x80	78	12730/13490
SBS/80/OV/CZ/DI	1200x2611x80	91	14740/15620

#### COLOR TEMPERATURE

3000K /3K  
4000K /4K

#### OPTIC

PMMA OPAL /--  
PRISMATIC /P

#### DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

#### COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACITE	/AT
	GOLD	/GL
	BRONZE	/BR

#### ACCESSORIES

- SPPKBO3075 (3X0,75)
- SPPKBO5075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX

Delivered incl. 2 m self-locking suspensions