


□ CUBUS SUSPENDED



ARCHILIGHT

60

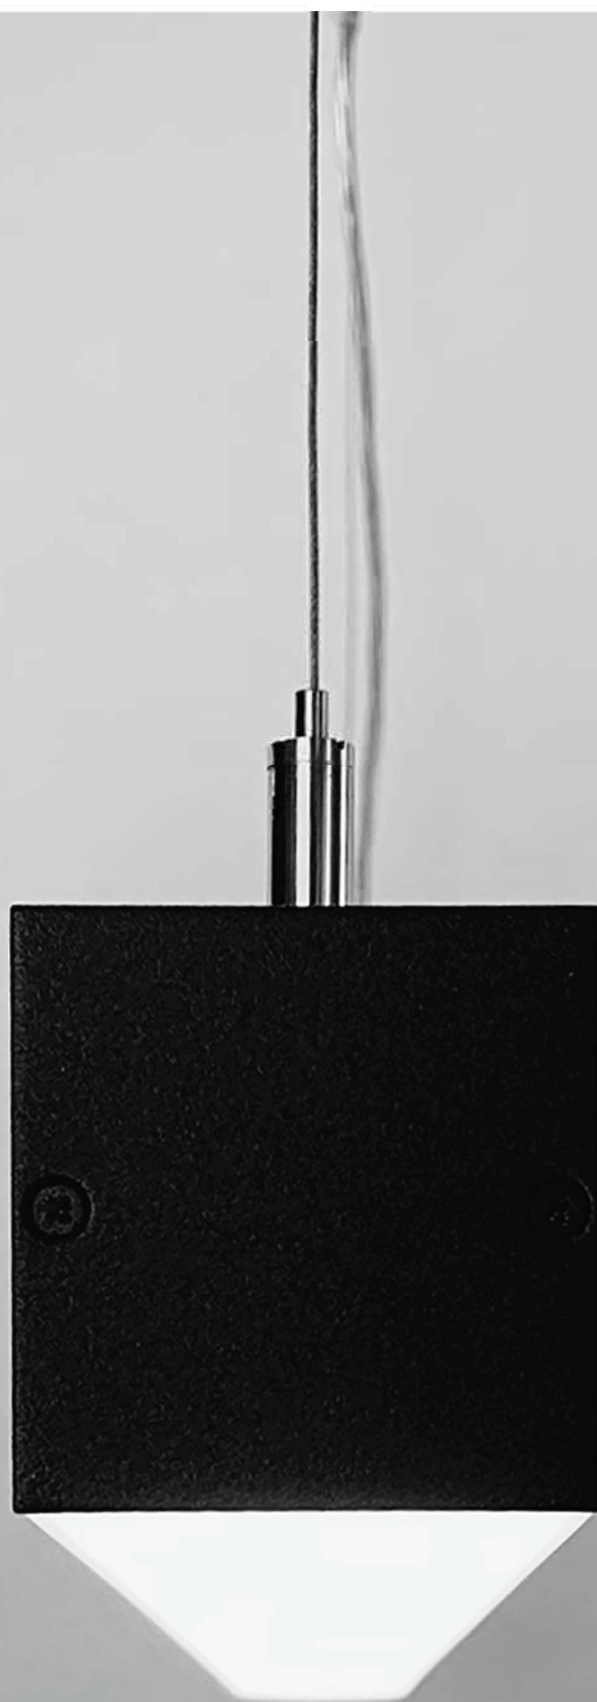

62



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCS130	595x60x62	9	1340/1420
SCS250	595x60x62	13	1860/1960
SCS195	850x60x62	13	2010/2130
SCS375	850x60x62	19	2790/2940
SCS260	1135x60x62	17	2680/2840
SCS500	1135x60x62	25	3720/3920
SCS325	1415x60x62	21	3350/3550
SCS625	1415x60x62	31	4650/4900
SCS2x195	1700x60x62	26	4020/4260
SCS2x375	1700x60x62	37	5580/5880
SCS2x230	1980x60x62	29	4690/4970
SCS2x440	1980x60x62	43	6510/6860
SCS2x260	2265x60x62	33	5360/5680
SCS2x500	2265x60x62	49	7440/7840
SCS2x325	2825x60x62	41	6700/7100
SCS2x625	2825x60x62	61	9300/9800

Delivered incl. 2 m self-locking suspensions

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

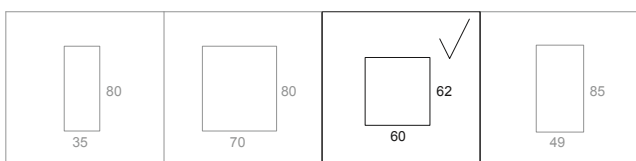

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

ACCESSORIES

